



Made in USA of Domestic and/or Imported Materials

PRODUCT DATA SHEET


AMI-FLEX® TAPE– Style No: FL04

For additional information please contact sales@auburnmfg.com

TECHNICAL DATA	IMPERIAL	METRIC
NOMINAL WIDTHS:	1 in	2.5 cm
	1.5 in	3.8 cm
	2 in	5.1 cm
	3 in	7.6 cm
	4 in	10.2 cm
NOMINAL THICKNESS:	0.250 in	6.350 mm
TEMPERATURE RESISTANCE:	600° F	316 ° C
ADHESIVE TEMPERATURE RESISTANCE:	300° F	149° C

PRODUCT HIGHLIGHTS

- ❖ Content: Yarns are a blend of meta & para-aramid with fiberglass inner core.
- ❖ Standard Put-Up: 50 FT/RL.
- ❖ Weave: Plain.
- ❖ These tapes are made by sewing 2 layers of FL08 Tapes together.
- ❖ Available with a high-performance pressure sensitive adhesive.
- ❖ Adhesive used for ease of installation. Additional mechanical bonding recommended.
- ❖ Intended for Commercial Use. Do not Launder.
- ❖ Material should be tested for its suitability in any application. Users should also familiarize themselves with the SDS.

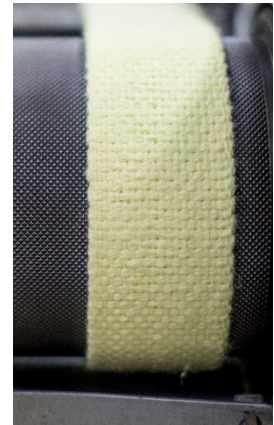

ALL STATEMENTS HEREIN ARE EXPRESSIONS OF OPINION WHICH WE BELIEVE TO BE ACCURATE AND RELIABLE BUT ARE PRESENTED WITHOUT GUARANTEE OR RESPONSIBILITY ON OUR PART. ANYONE INTENDING TO USE RECOMMENDATIONS CONTAINED IN THIS PUBLICATION CONCERNING EQUIPMENT, PROCESSING TECHNIQUES OR PRODUCTS SHOULD FIRST SATISFY THEMSELVES THAT THE RECOMMENDATIONS ARE SUITABLE FOR THEIR USE AND MEET ALL APPROPRIATE SAFETY & HEALTH STANDARDS.